1990 TOYOTA CELICA ST WITH 1.6 L ENGINE
THROTTLE LEVER ADAPTOR PACKAGE
250-4204

1) Remove the throttle shaft nut and lock washer from the throttle shaft. Install the **Bracket - Throttle Lever.** Reinstall the lock washer and hex nut, and torque the nut to 84 in-lb (7 ft-lb). **Note:** Start the nut by hand to prevent cross-threading. Do not over tighten.

FIGURE 1

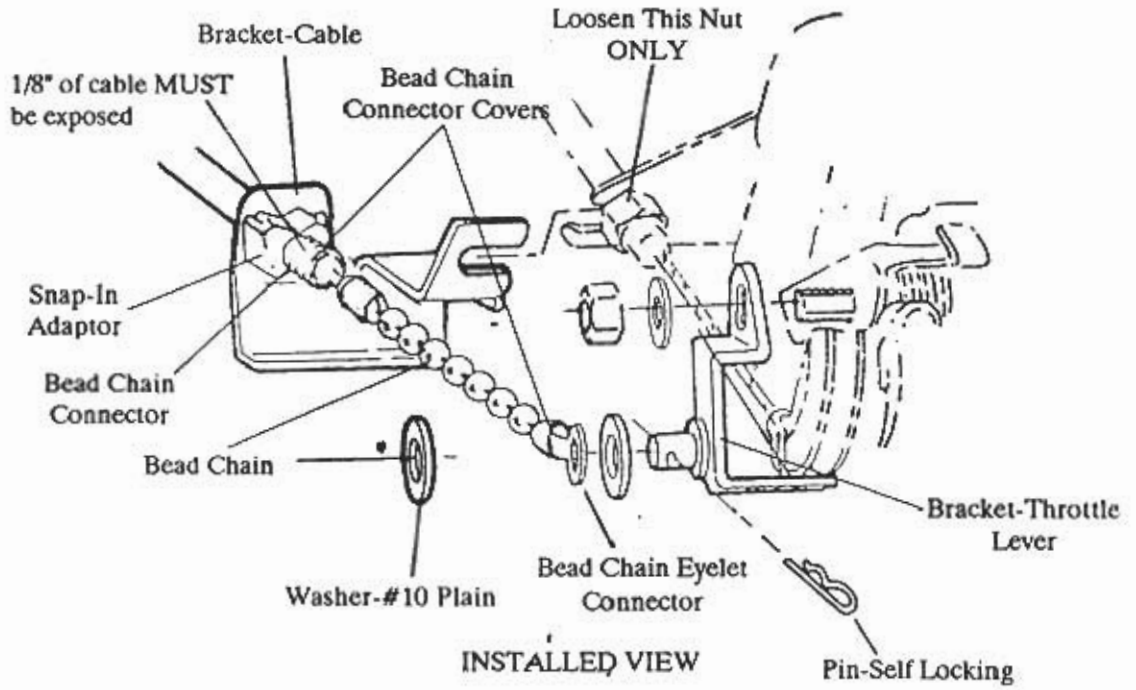

INSTALLED VIEW

2) Loosen the accerator cable bracket jam nut. Loosen only the nut shown in **Figure 1.**

3) Install **Bracket-Cable** between the accelerator cable bracket and the jam nut previously loosened and retighten the jam nut.

4) Remove the **Snap-In Adaptor** from the Cruise Control Kit.

5) Remove the **Adjustable Sleeve** from the Cruise Control Module Cable.

© Dana Corporation 1990
All Rights Reserved
Printed in the United States of America

6) To use the **Snap-In Adaptor**, it will be necessary to form threads on the end of the Cruise Control Module Cable. This is accomplished by placing the **1/4" - 20 Nut and Washer Assembly** on the end of the Cruise Control Module Cable with your fingers, then use a 7/16" box end wrench and turn clockwise, until the desired amount of threads have been formed as shown in **Figure 2.**

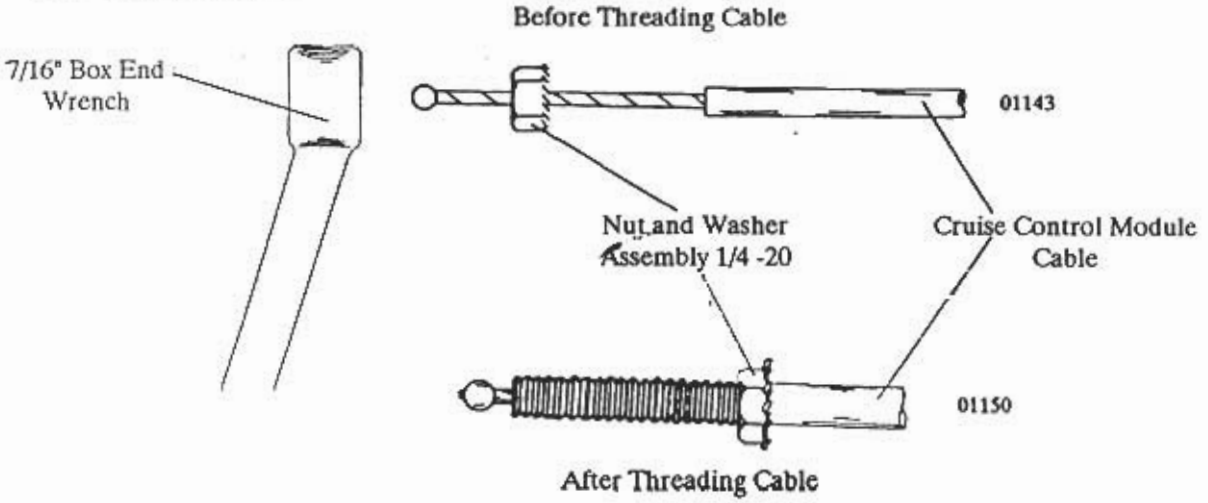

FIGURE 2

7) After the threads have been formed screw the **Snap-In Adaptor** onto the Cruise Control Module Cable and snap into the **Bracket-Cable** as shown in **Figure 1.**

8) Install the **Bead Chain Eyelet Connector**, with the **Bead Chain** and **Bead Chain Connector Cover** in place, and the **Washer- #10 Plain** to the **Bracket-Throttle Lever** and install the **Pin- Self Locking** as shown in **Figure 1.**

9) Connect the **Bead Chain** with the **Bead Chain Connector** (Double Ended), to the Cruise Control Module Cable, with no slack in **Bead Chain,** and install a **Bead Chain Connector Cover** as shown in **Figure 1.**

10) Be sure that the throttle is not being held open by the Cruise Control Cable. Adjust cable by releasing **Snap-in Adaptor** from **Bracket-Cable** and threading in or out to adjust cable to proper length. Snap **Adaptor** back into **Bracket.**